
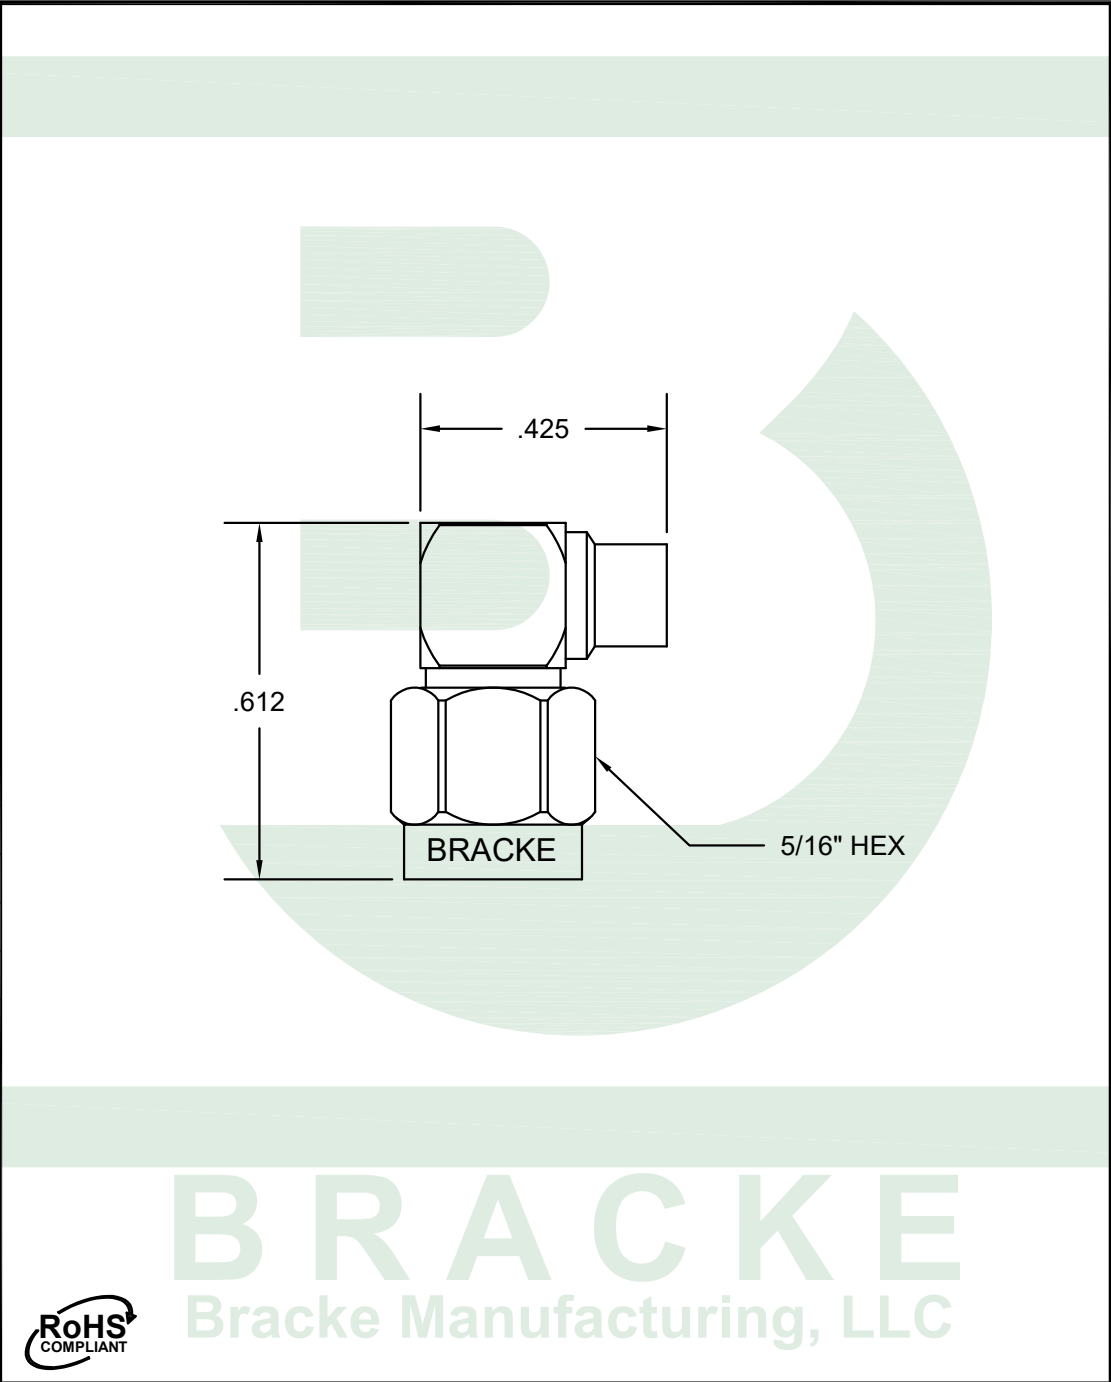
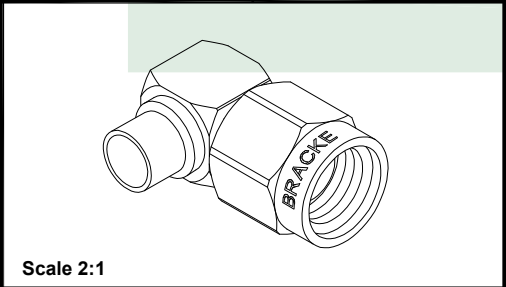
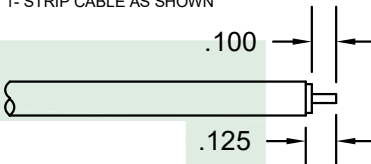
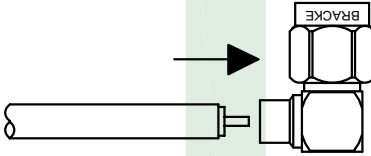


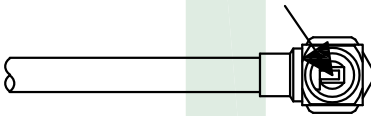
MATERIALS	
BODY	BRASS GOLD PLATED
COUPLING NUT	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HARDWARE	
 CAP	
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	12.4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.50:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B




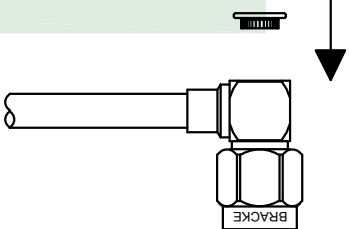
1- STRIP CABLE AS SHOWN


2- REMOVE BURRS AND SHARP EDGES FROM COPPER JACKET WITH SCOTCH BRITE (FOR COPPER CABLES ONLY)


3- INSERT CABLE INTO BODY


4- SOLDER CONTACT TO CENTER CONDUCTOR


6- SOLDER 360° IN AREA SHOWN


6- PRESS CAP DOWN


A  
S  
S  
E  
M  
B  
L  
Y  
  
I  
N  
S  
T  
R  
U  
C  
T  
I  
O  
N  
S

 <div><b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	<b>Part Number</b>		<b>Description</b>		<b>CAGE / NAGE</b>	
	<b>BM60711</b>		<b>Reverse Polarity SMA Male Right Angle</b>		6LOW2	
			Solder Connector [RG402, RG402-Alum, RG402-Flex, RG402-Flex-Jacketed]		<b>Scale</b>	<b>Unit</b>
					3:1	Inches
					<b>Date</b>	<b>Revision</b>
	<b>Produced By</b>	<b>Checked By</b>	<b>Notes</b>			
	002	007	<ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li></ul> <div>©2023 Bracke Manufacturing, LLC</div>		8/30/2023	A-01