



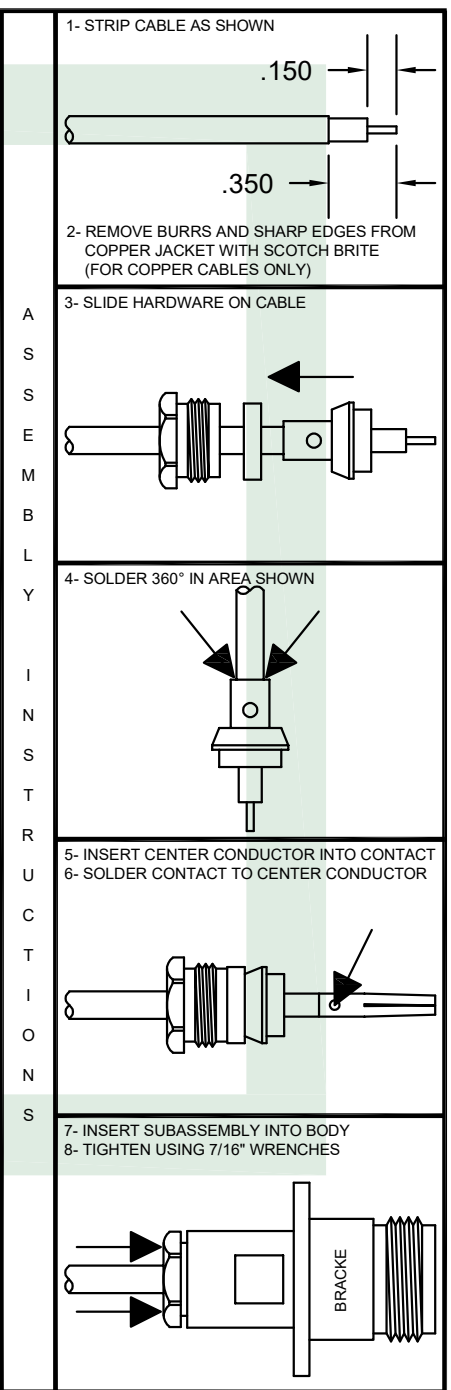
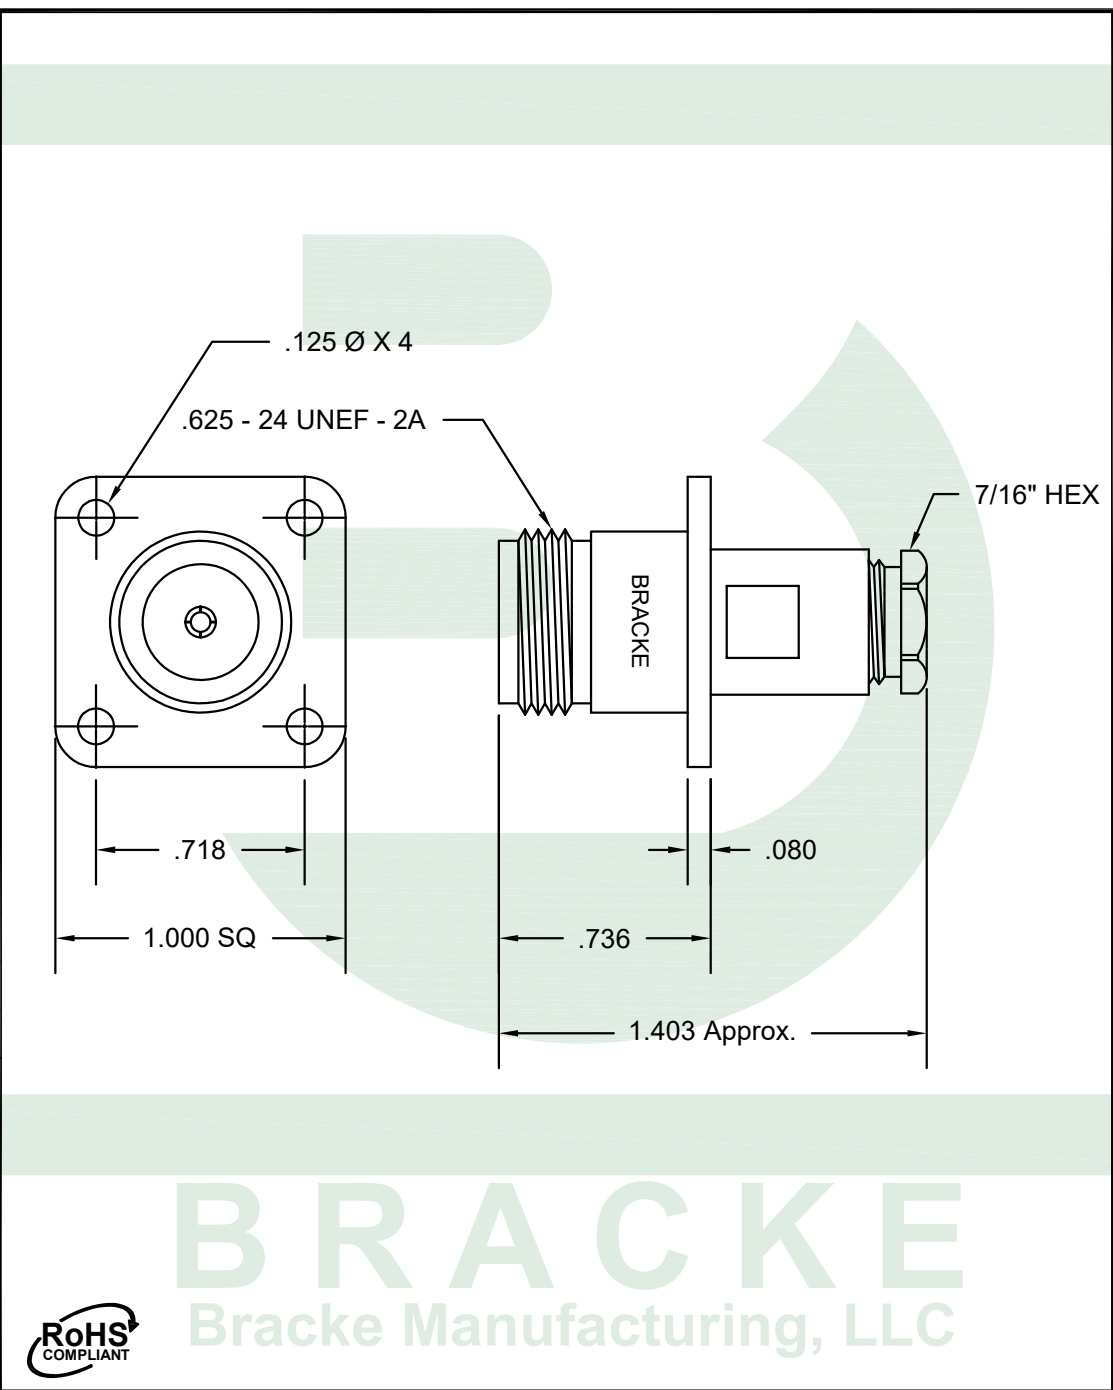
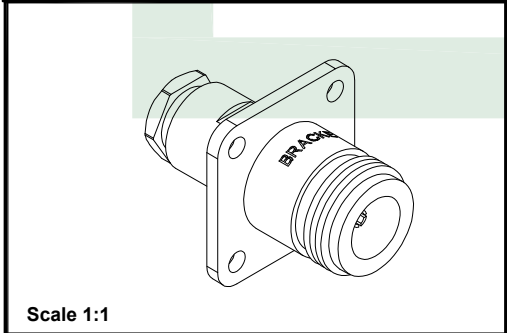



MATERIALS	BODY	BRASS NICKEL PLATED
	SOLDER SLEEVE	GOLD PLATED
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
	GASKET	RUBBER
HARDWARE		
		
		
		
	CLAMP NUT GASKET SOLDER SLEEVE CONTACT	

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5,000 MΩ
OPERATING FREQUENCY	11 GHz
DIELECTRIC WITHSTANDING VOLTAGE	2,500 Vrms
VSWR TYPICAL	1.50:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	1,500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B



 BRACKE	Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
		BM61380				6LOW2	
		Produced By	Checked By	Notes		Scale	Unit
		002	007			1.5:1	Inches
				<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2023 Bracke Manufacturing, LLC</div>		Date	Revision
		10/24/2023	A-01				