
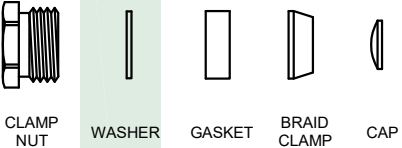
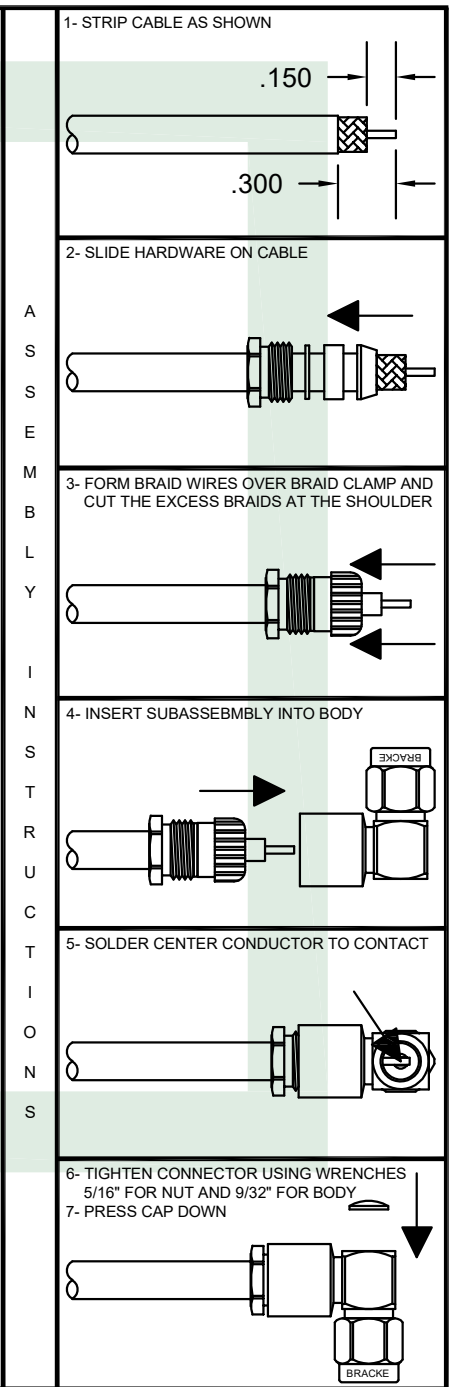
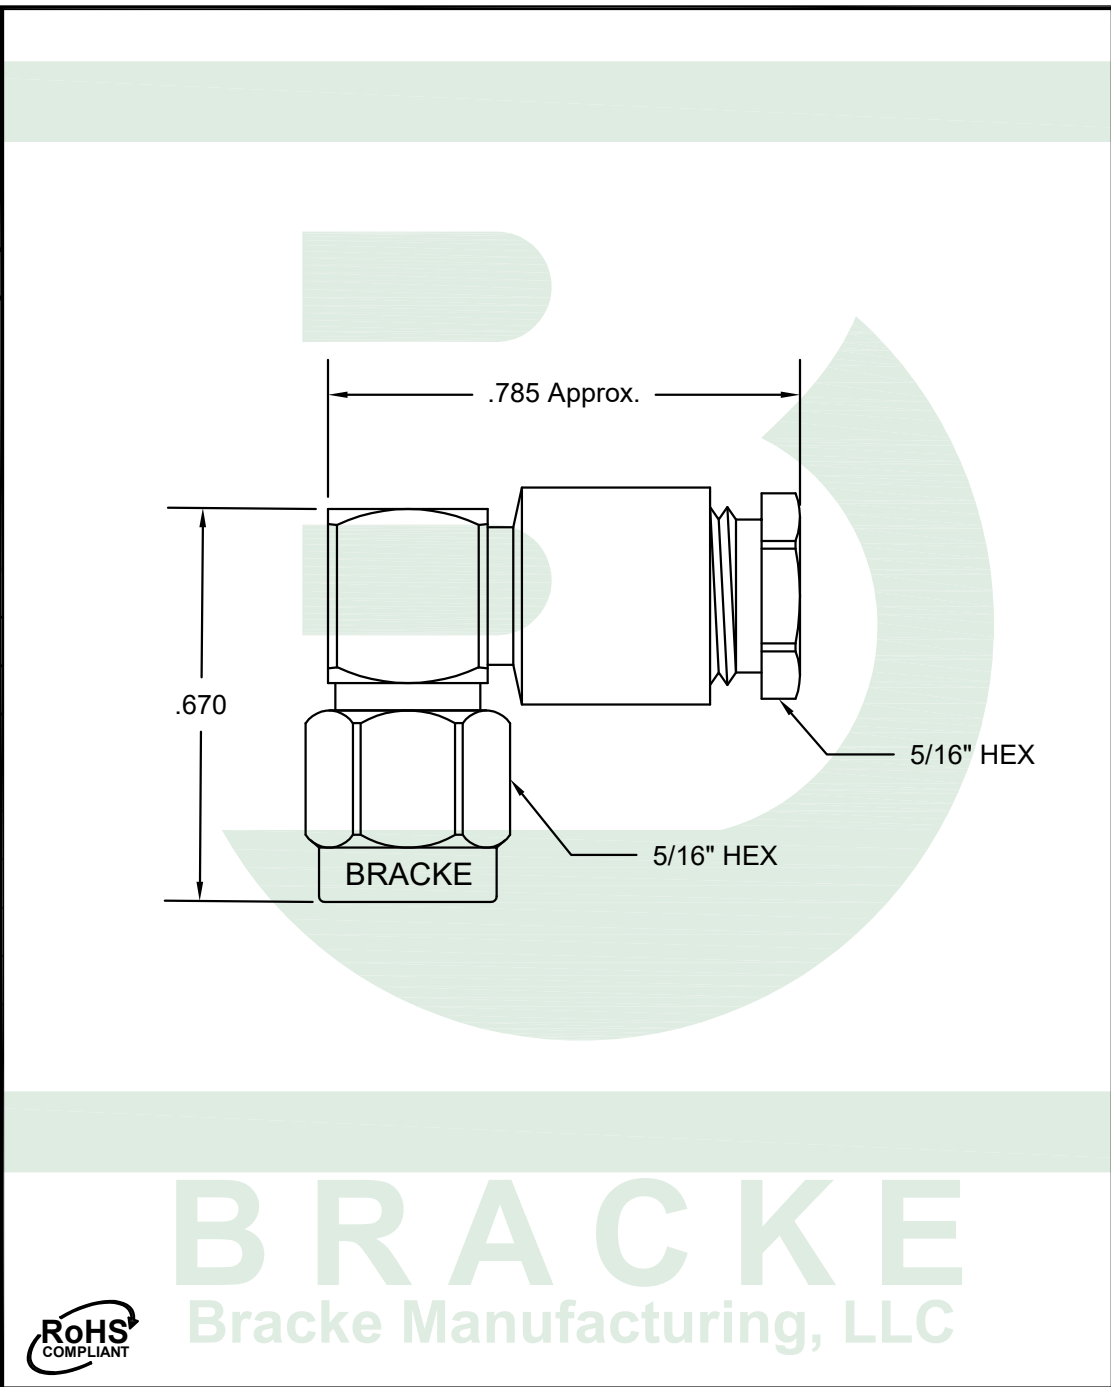



MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
GASKET	RUBBER
HARDWARE	
	
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	12.4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.40:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

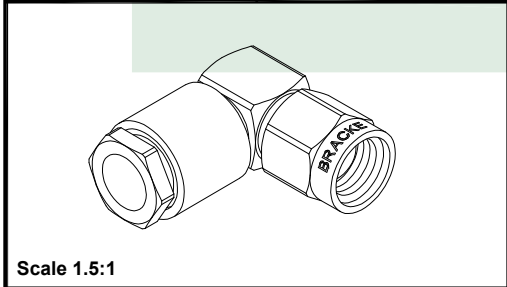

 <b>BRACKE</b>	<b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	<b>Part Number</b>		<b>Description</b>		<b>CAGE / NAGE</b>	
		<b>BM60620</b>		<b>Reverse Polarity SMA Male Right Angle</b> Clamp Connector [RG55, RG58, RG141, RG142, RG223, RG400]		6LOW2	
		<b>Produced By</b>		<b>Checked By</b>		<b>Scale</b>	<b>Unit</b>
		002		007		3:1	Inches
						<b>Date</b>	<b>Revision</b>
				<b>Notes</b> <ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li></ul> ©2023 Bracke Manufacturing, LLC		8/22/2023	A-01