




CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHM	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHM
BODY	BRASS NICKEL PLATED	JACKET	.240" Ø THERMOPLASTIC ELASTOMER	NOMINAL CAPACITANCE	24.2 PF/FOOT	BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	DIELECTRIC	.150" Ø FPE	MAX OPERATING VOLTAGE	5,000 VOLTS RMS	CONTACT	GOLD PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.056 Ø BARE COPPER	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

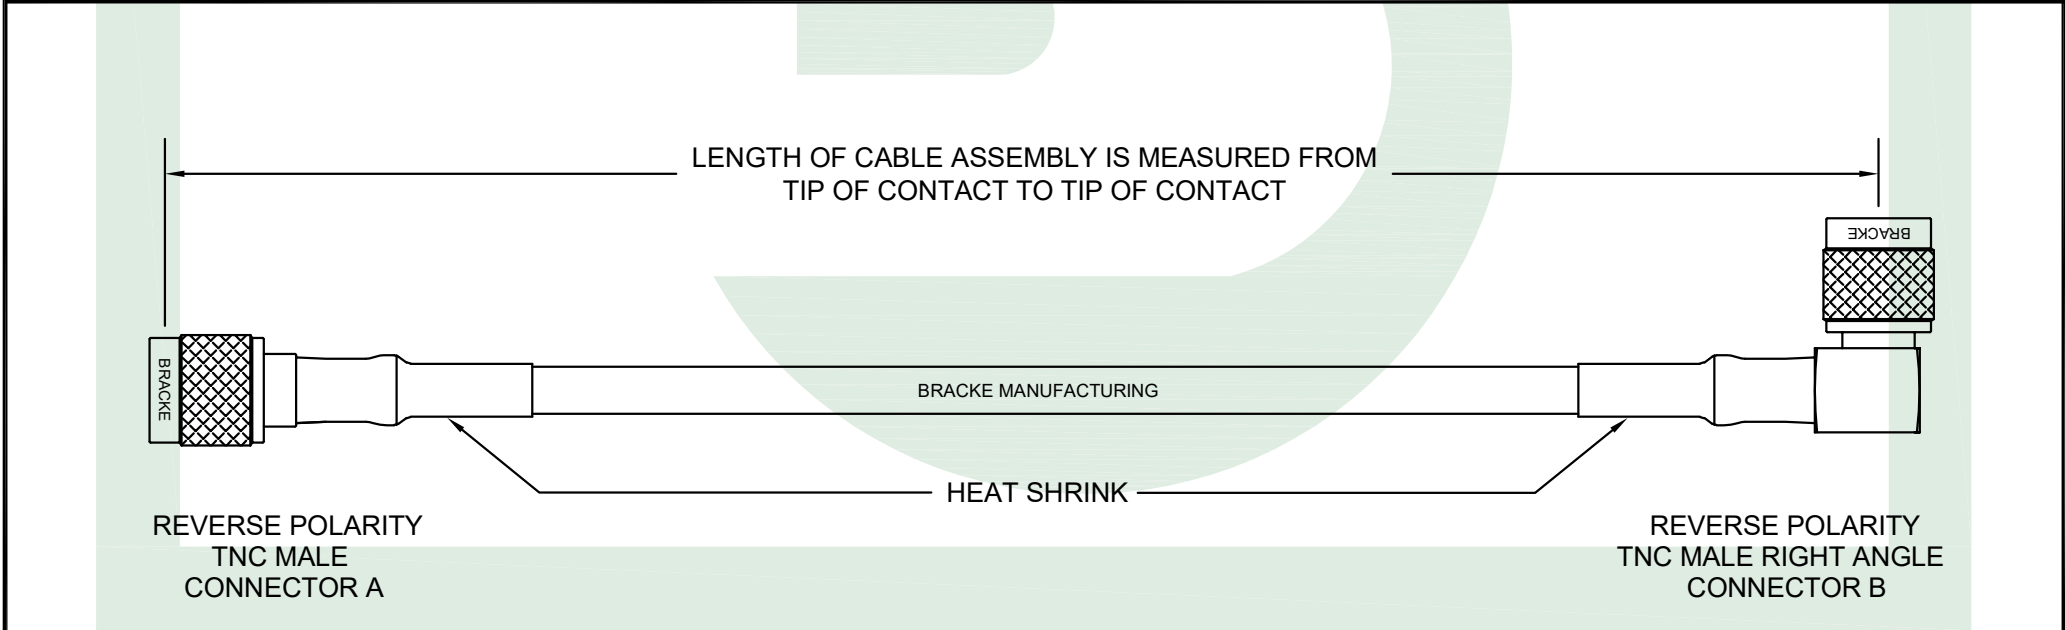

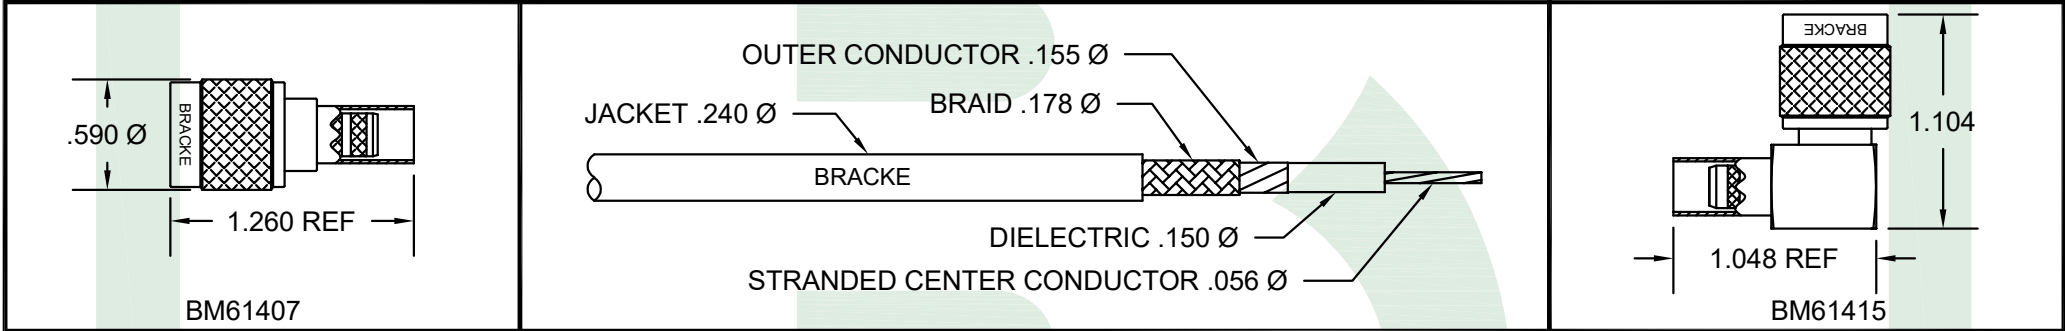


LMR® is a registered trademark of Times Microwave Systems

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM92242.**		Reverse Polarity TNC Male to Reverse Polarity TNC Male Right Angle, Cable Assembly using LMR®-240-Ultra-Flex Cable		6LOW2	
					Scale	Unit
	Produced By	Checked By	Notes <ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.• Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater• Replace ** with ANY length in Inches <div>©2025 Bracke Manufacturing, LLC</div>		1:1	Inches
	002	013			Date	Revision
					06/23/2025	A-01