


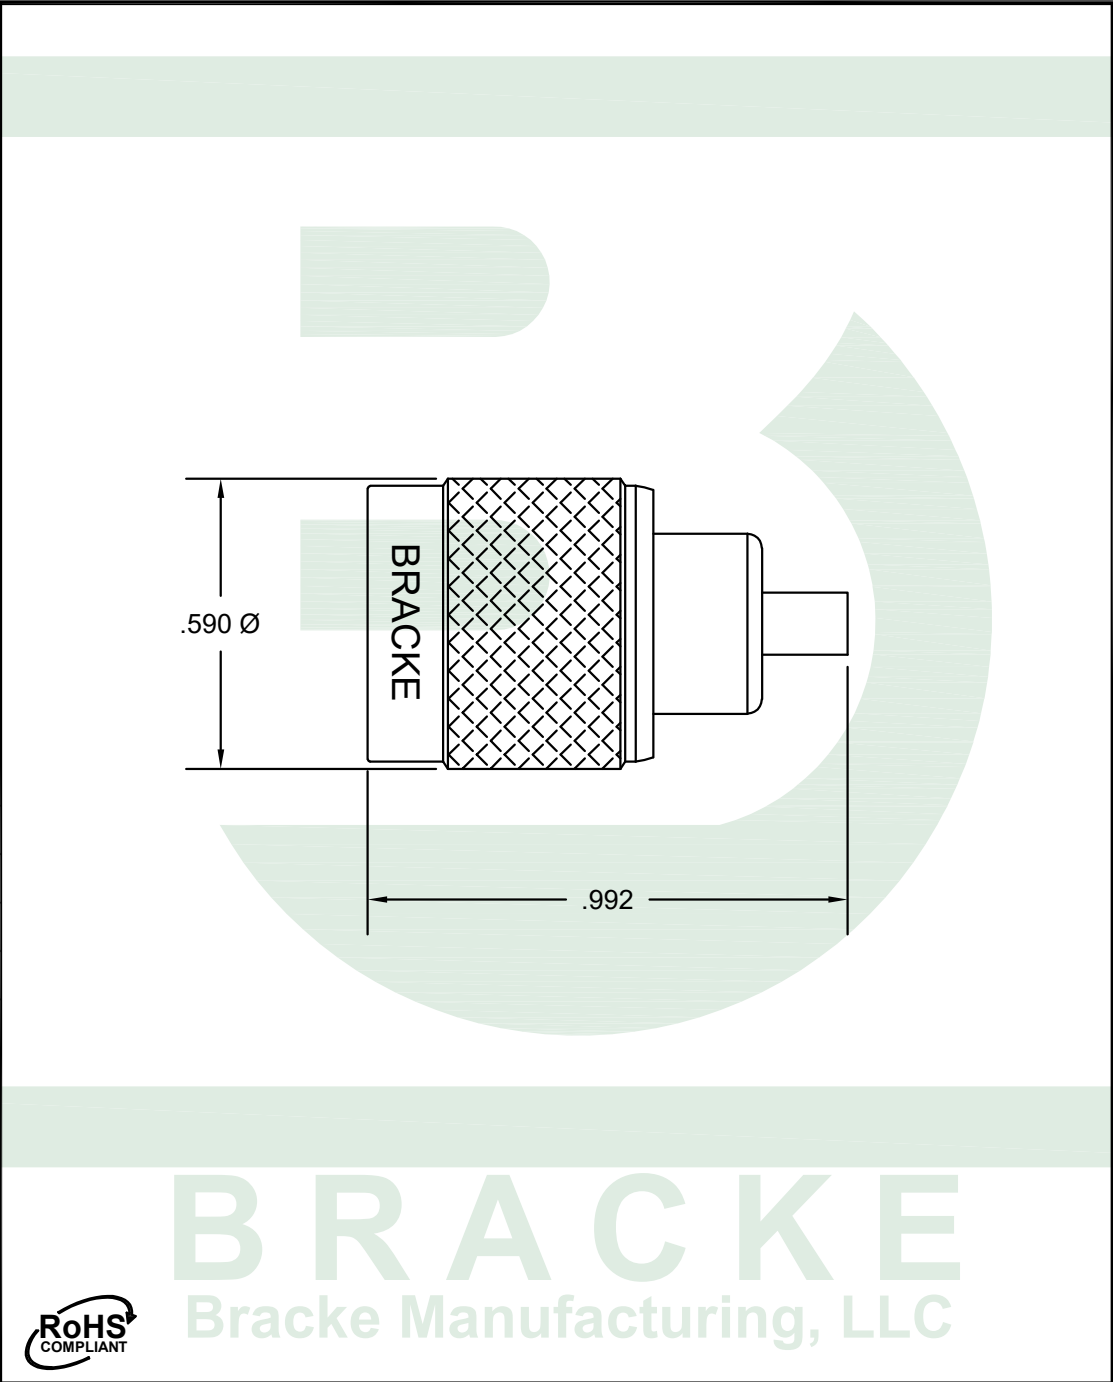


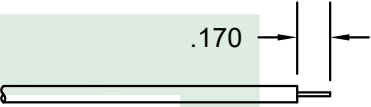
MATERIALS	
BODY	BRASS NICKEL PLATED
SOLDER SLEEVE	GOLD PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HARDWARE	
	
CONTACT	TEFLON
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHM
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	11 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.35:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B




Scale 1:1




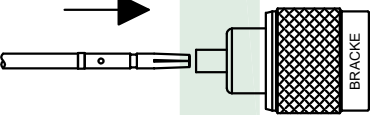



1- STRIP CABLE AS SHOWN


2- REMOVE BURRS AND SHARP EDGES FROM COPPER JACKET WITH SCOTCH BRITE (FOR COPPER CABLES ONLY)


3- SLIDE TEFLON AND CONTACT OVER CENTER CONDUCTOR


4- SOLDER CONTACT TO CENTER CONDUCTOR


5- INSERT CABLE INTO BODY


6- SOLDER 360° IN AREA SHOWN


A  
S  
S  
E  
M  
B  
L  
Y  
  
I  
N  
S  
T  
R  
U  
C  
T  
I  
O  
N  
S

 <b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	<b>BM61337</b>		<b>Reverse Polarity TNC Male</b> Solder Connector [RG405, RG405-Alum, RG405-Flex, RG405-Flex-Jacketed]		6LOW2	
					Scale	Unit
	Produced By	Checked By	<b>Notes</b> <ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li></ul> ©2023 Bracke Manufacturing, LLC		2.5:1	Inches
	002	007			Date	Revision
					10/24/2023	A-01