
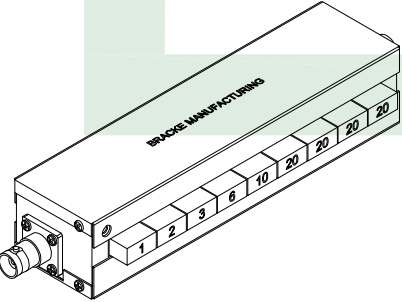
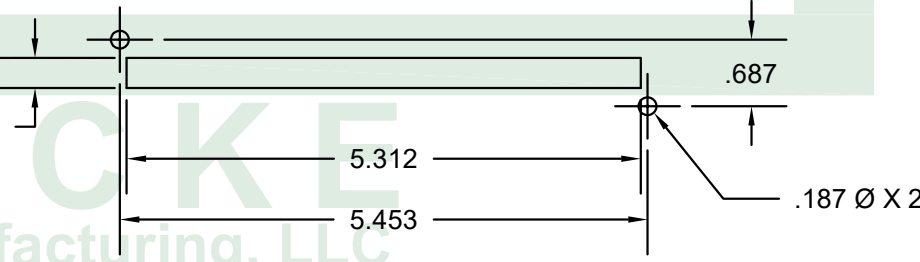
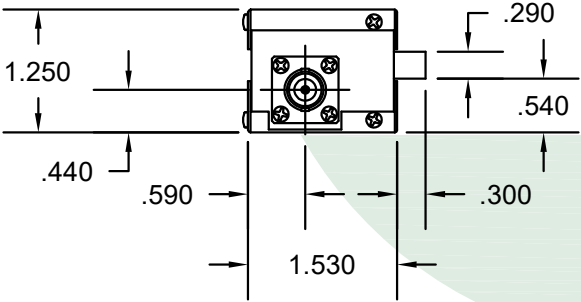


MATERIALS

BNC CONNECTORS	BRASS NICKEL PLATED
CONTACTS	GOLD PLATED
INSULATORS	PTFE

OPERATIONAL SPECIFICATIONS


IMPEDANCE (OHM)	50
FREQUENCY RANGE (GHz)	DC - 750
VSWR (MAX)	1.40:1
INPUT POWER (WATTS)	1
PEAK POWER (WATTS)	100
ATTENUATION RANGE (dB)	0 - 102 dB in 1 dB STEPS
ATTENUATION STEPS (dB)	1, 2, 3, 6, 10, 20, 20, 20 and 20
ACCURACY (dB)	+/- .3 or 1%
INSERTION LOSS RANGE (°C)	1.50
OPERATING TEMP. RANGE (°C)	-40 to +70

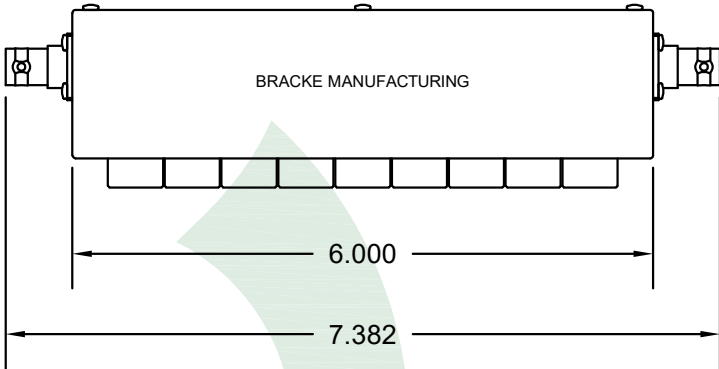


BRACKE

Bracke Manufacturing, LLC

Scale 3/8:1



 <div><b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	Part Number		Description		CAGE / NAGE	
	<b>BM10042</b>		<b>BNC Female</b>		6LOW2	
	50 Ohm [Pushbutton Attenuator, Max VSWR 1.40:1 @ 750 MHz]				Scale	Unit
					1/2:1	Inches
					Date	Revision
				1/05/2024	A-01	

Notes

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2024 Bracke Manufacturing, LLC