


M A T E R I A L S	HOUSING	ALUMINUM
	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L O C P T E R I T I C A L S	RF CONNECTORS	SMA FEMALE
	BIAS CONNECTORS	SOLDER PINS
	FREQUENCY RANGE (GHz)	1 - 5
	VSWR (MAX)	1.50:1
	INSERTION LOSS (dB MAX)	1.00
	ISOLATION (dB TYP)	35
	VOLTAGE (VDC MAX)	50
	CURRENT (MAX)	1000 mA



BRACKE
Bracke Manufacturing, LLC

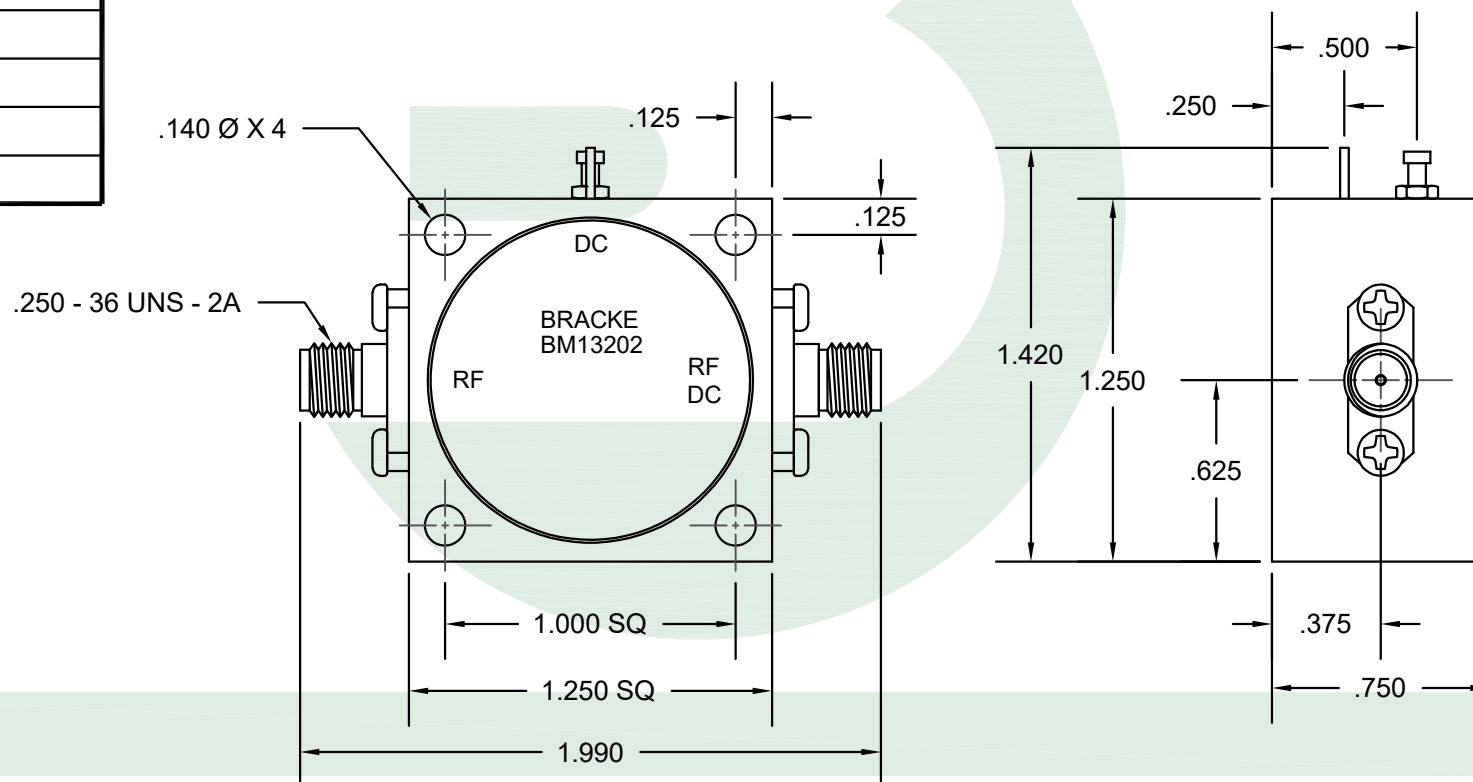

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description		CAGE / NAGE	
BM13202		SMA Female Solder Pins		6LOW2	
Produced By		Checked By		Scale	Units
002		013		1.5:1	Inches
		Notes		Date	Revision
		<ul style="list-style-type: none"> Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 		11/11/2013	A-01
		©2020 Bracke Manufacturing, LLC			