


M A T E R I A L S	WAVEGUIDE BODY	ALUMINUM
	CONNECTOR	PASSIVATED STAINLESS STEEL
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
	O - RING	RUBBER
E L E C T R I C A L S	IMPEDANCE (OHM)	50
	WAVEGUIDE	CPR - 229G
	FREQUENCY RANGE (GHz)	3.3 - 4.9
	VSWR (MAX)	1.30:1

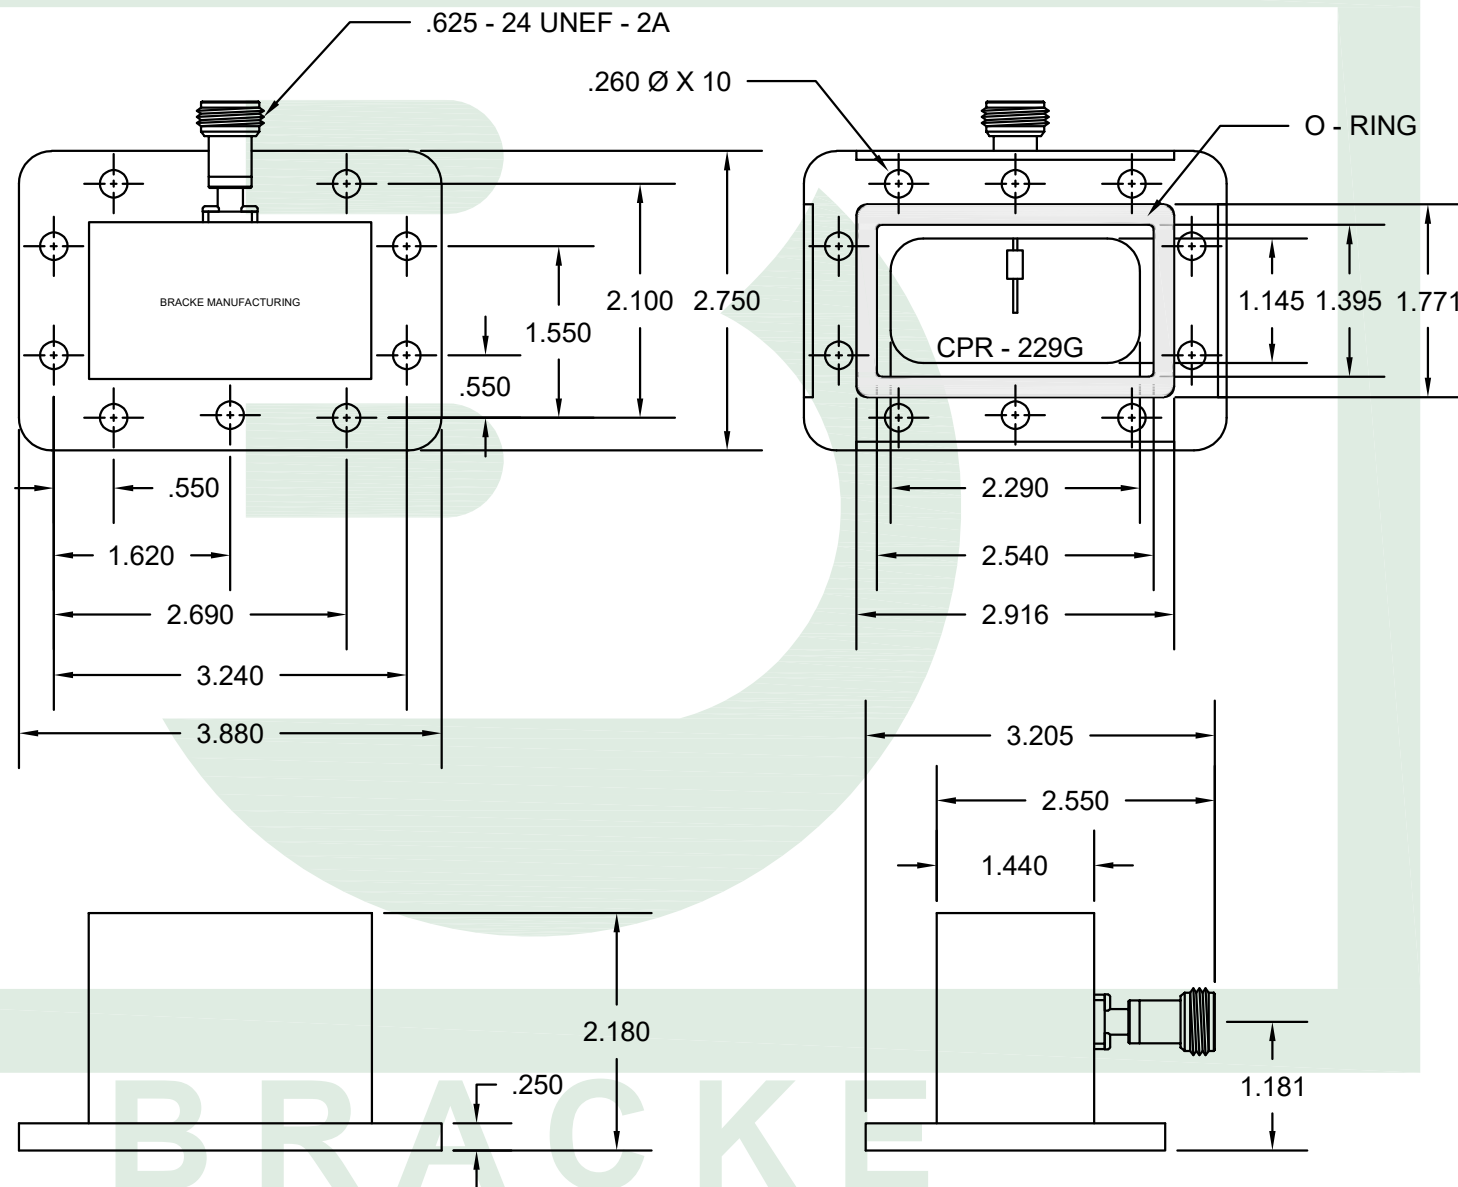

Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949)756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number	
BM75031	
Produced By	Checked By
012	013

Description
N Female to CPR-229G Frequency Range 3.3 - 4.9 GHz [Waveguide with O-Ring]
Notes
<ul style="list-style-type: none"> Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.
©2022 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Unit
9/16:1	Inches
Date	Revision
11/18/2022	A-01