


MATERIALS	
BODY	BRASS GOLD PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	6 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR MAX	1.30:1
INSERTION LOSS MAX	.05 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B



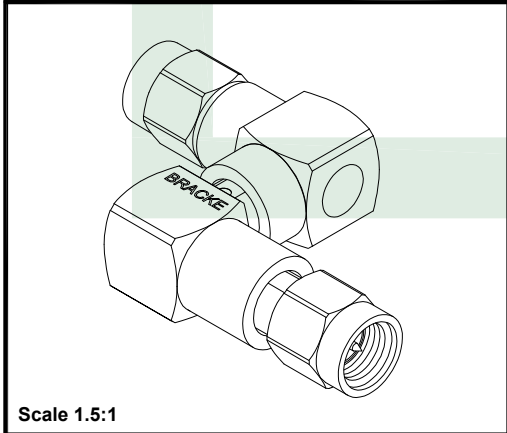


Bracke Manufacturing, LLC


PO Box 12319

Newport Beach, Ca 92658

Phone (949)756-1600 / Fax (949) 756-1601

sales@brackemfg.com / www.brackemfg.com

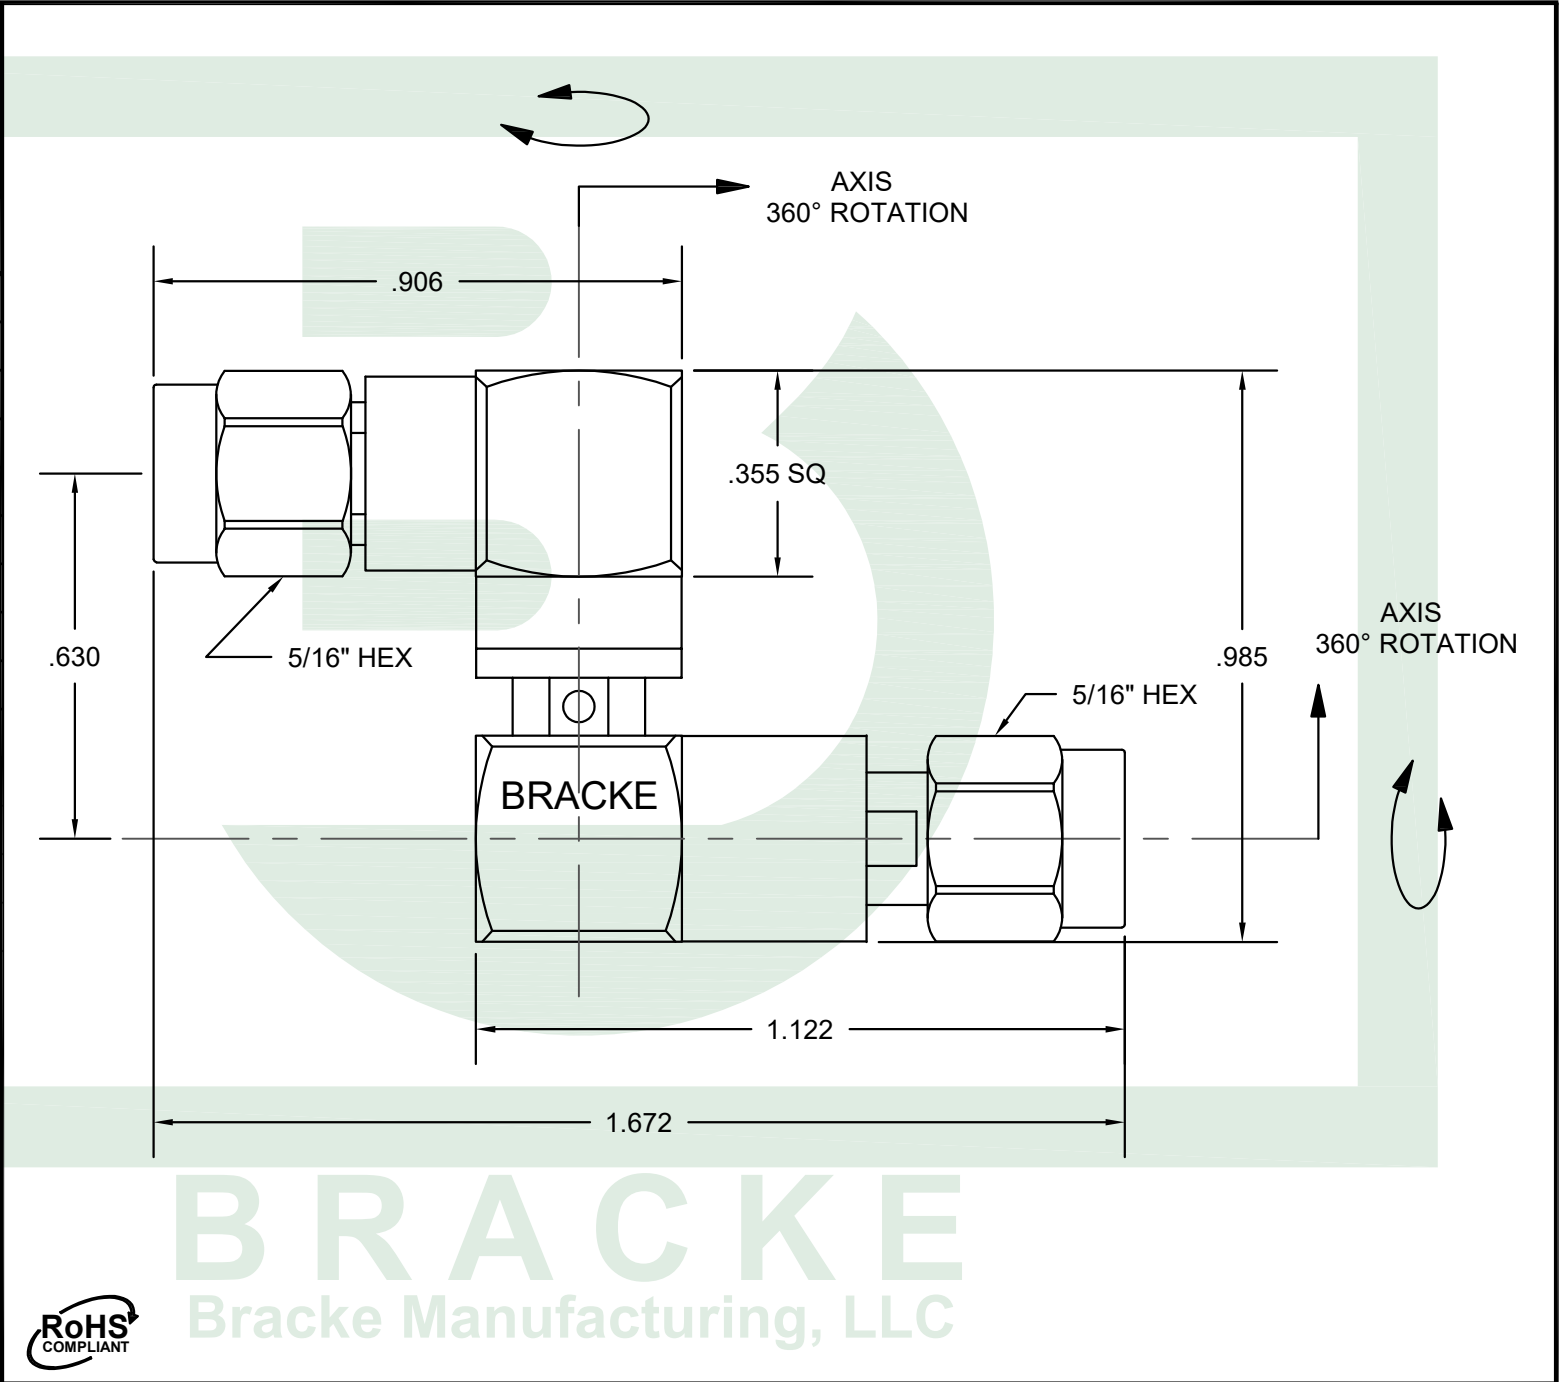

		Part Number	Description	CAGE / NAGE	
		BM50931	SMA Male to SMA Male Rotary Joint, Multi-Directional [Precision Adapter]	6LOW2	
Produced By		Checked By	Notes • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2023 Bracke Manufacturing, LLC	Scale	Unit
002		007		3:1	Inches
				Date	Revision
				6/19/2023	A-01