CONNECTOR A	
IMPEDANCE	50 OHMS
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	HDPE
GASKET	RUBBER

CABLE CHARACTERISTICS			
IMPEDANCE	50 OHMS	SHIELDS	2 SHIELDS SILVER PLATED COPPER
JACKET	.390" Ø FLUORINATED ETHYLENE PROPYLENE	NOMINAL CAPACITANCE	32.0 PF/FOOT
DIELECTRIC	.285" Ø PTFE	MAX OPERATING VOLTAGE	5,000 VOLTS RMS
CENTER CONDUCTOR	.0936" Ø (7 STRANDS .0312" Ø) SILVER PLATED COPPER	OPERATING TEMPERATURE	-55°C TO +200°C

CONNECTOR B	
IMPEDANCE	50 OHMS
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE

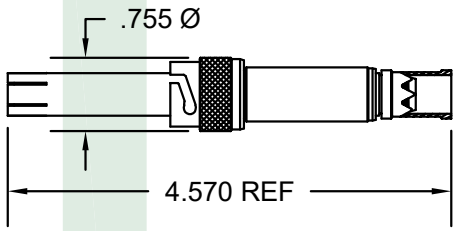

BM61032

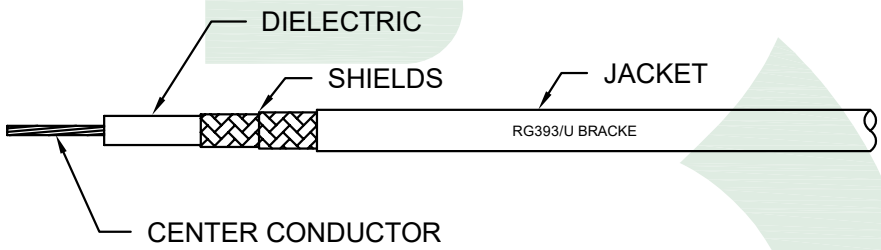



BM60225

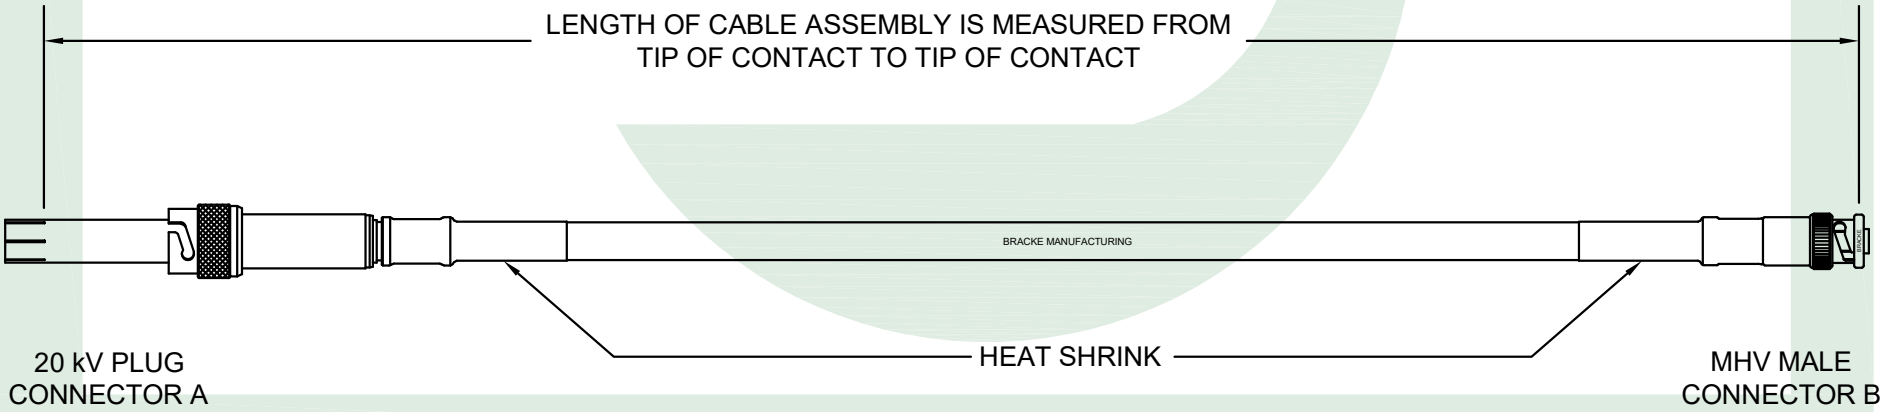

RoHS COMPLIANT

BRACKE
Bracke Manufacturing, LLC

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number	Produced By	Checked By
BM90520.**	002	013

Description

20 kV Plug to MHV Male, RG393/U
[Cable Assemblies]

Notes

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.
- Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater
- Replace ** with ANY length in Inches

©2021 Bracke Manufacturing, LLC

CAGE / NAGE	
6L0W2	
Scale	**Unit**
1/2:1	Inches
Date	**Revision**
09/13/2021	A-01