



M A T E R I A L S	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATORS	PTFE
E P L O P T E R I C A E L S	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	.05 - 3
	VSWR (MAX)	1.35:1
	INPUT POWER (WATTS MAX)	2
	DC CURRENT (AMPS MAX)	2
	VOLTAGE RATING (VOLTS MAX)	100
	ATTENUATION (dB)	6
	ACCURACY (dB)	+/- 2.00
	OPERATING TEMP. RANGE (°C)	-55 to +85

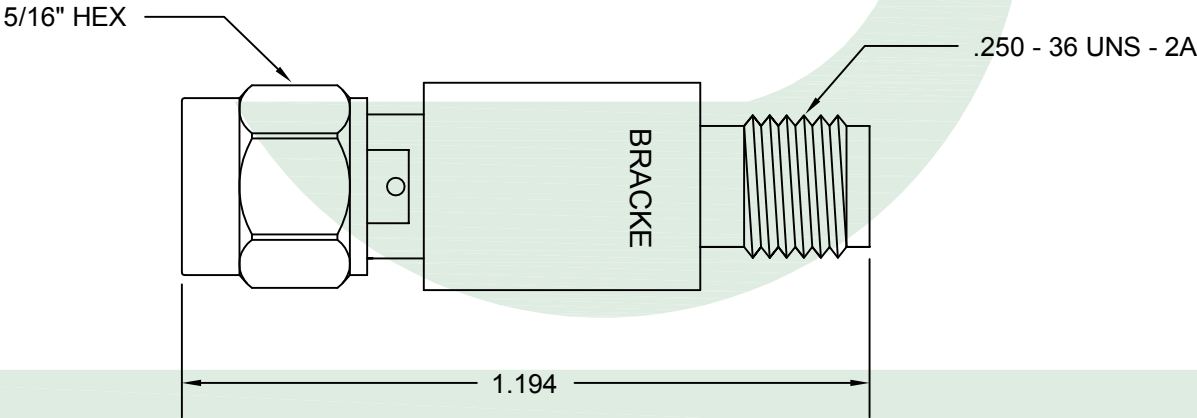

BRACKE
Bracke Manufacturing, LLC

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM10057.6				6LOW2	
					Scale	Unit
					3:1	Inches
	Produced By		Checked By		Date	Revision
	002		013		05/21/2014	A-01
				Notes		
				• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2014 Bracke Manufacturing, LLC		