
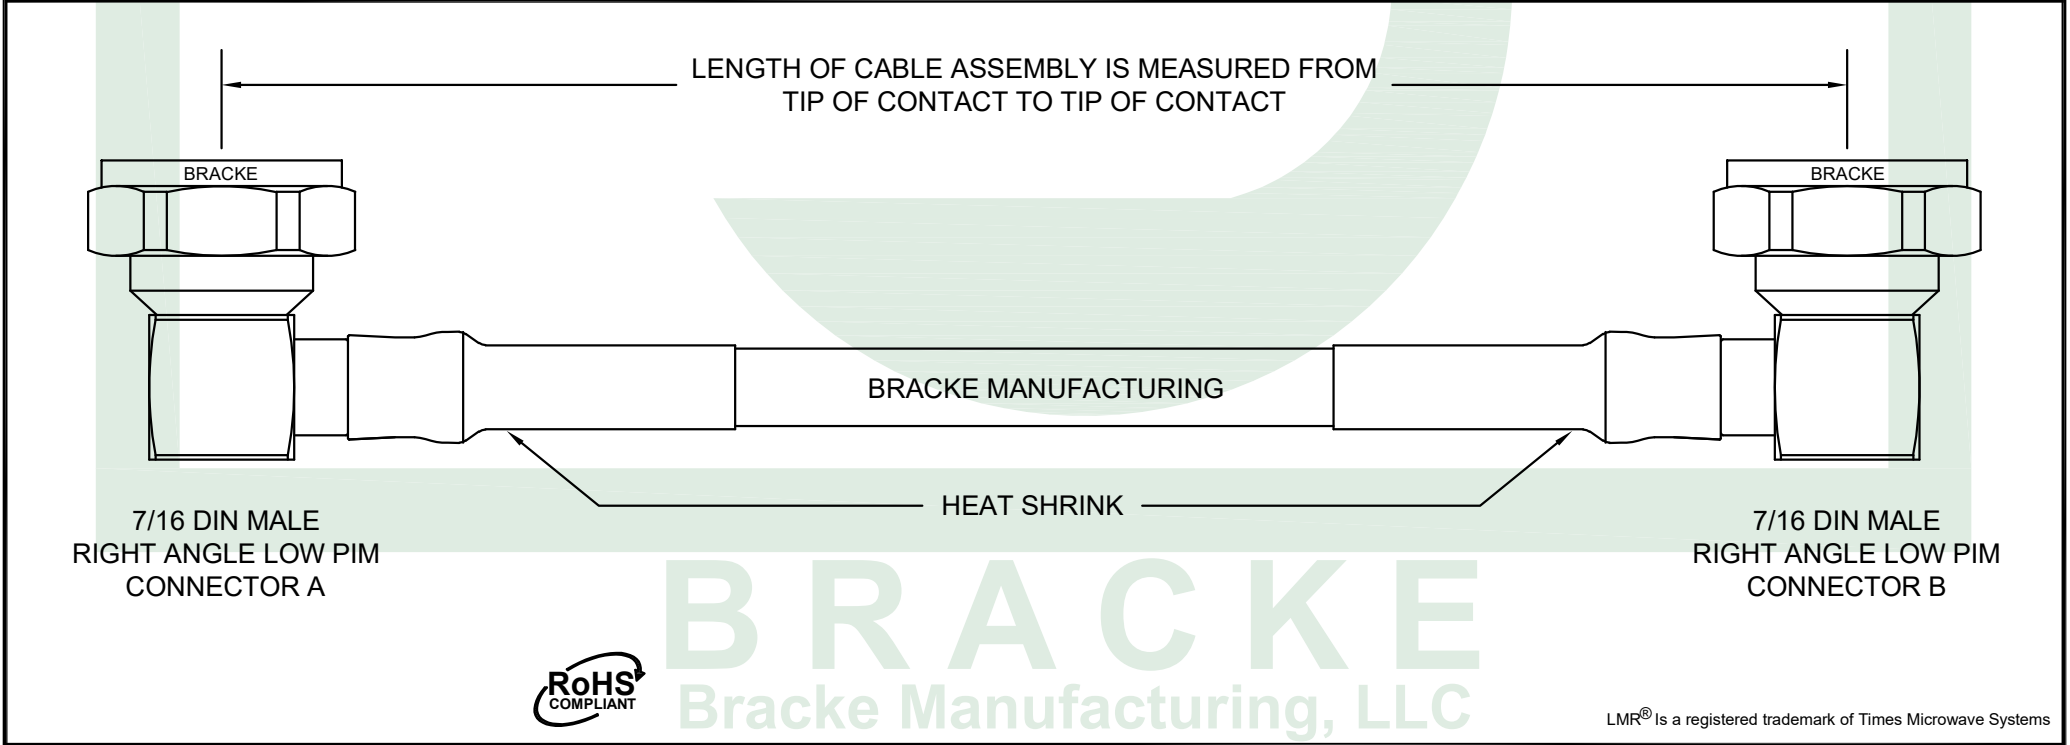



CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHM	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHM
BODY	BRASS TRI-METAL PLATED	JACKET	.405" Ø POLYETHYLENE	NOMINAL CAPACITANCE	23.9 PF/FOOT	BODY	BRASS TRI-METAL PLATED
CONTACT	SILVER PLATED	DIELECTRIC	.285" Ø FOAM POLYETHYLENE	MAX OPERATING VOLTAGE	8,000 VOLTS RMS	CONTACT	SILVER PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.108 Ø SOLID BARE COPPER COVERED ALUMINUM	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

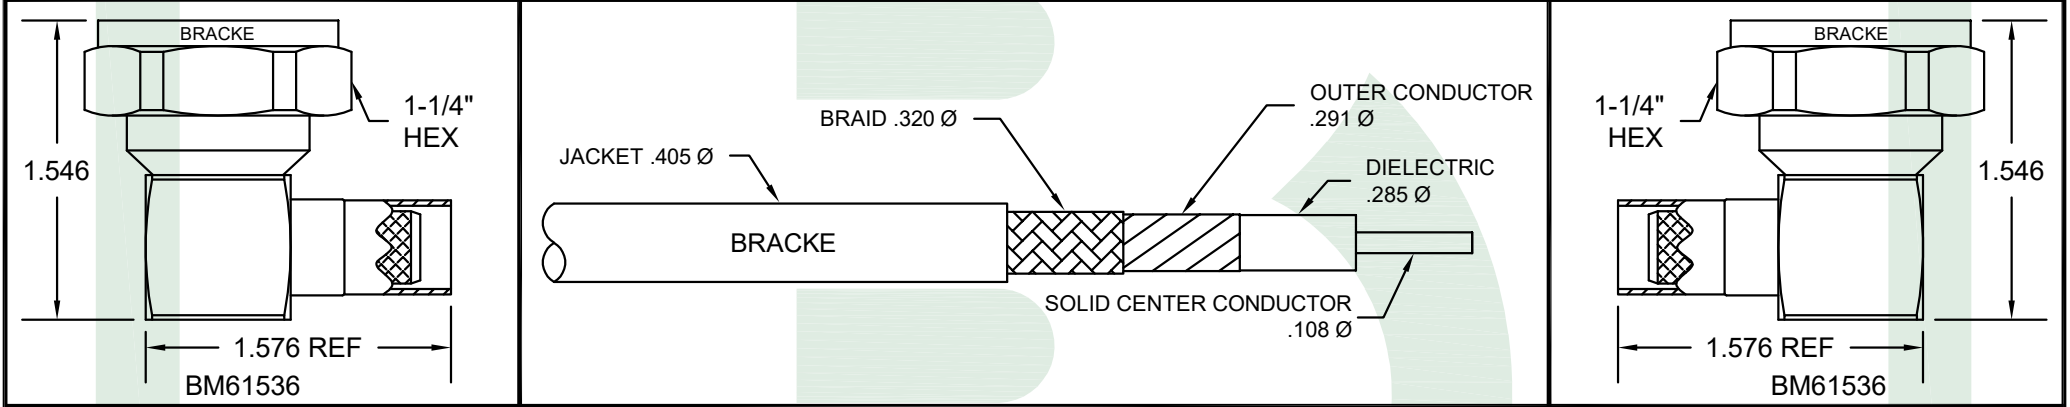

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM92350.**		7/16 DIN Male Right Angle Low PIM to 7/16 DIN Male Right Angle Low PIM, Cable Assembly using LMR®-400-Dir-Burial Cable		6LOW2	
	Produced By	Checked By	Notes <ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.• Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater• Replace ** with ANY length in Inches		Scale	Unit
	002	013			1:1	Inches
	©2025 Bracke Manufacturing, LLC				Date	Revision
			06/23/2025	A-01		