


M A T E R I A L S	HOUSING	ALUMINUM
	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L O C P T E R I T I C I A L S	RF CONNECTORS	SMA FEMALE
	BIAS CONNECTORS	SOLDER LUG & PIN
	FREQUENCY RANGE (GHz)	.01 - 4
	VSWR (MAX)	1.50:1
	INSERTION LOSS (dB MAX)	1.25
	ISOLATION (dB TYP)	30
	VOLTAGE (VDC MAX)	100
	CURRENT (MAX)	2.5 Amps
	RF POWER (WATTS MAX)	5

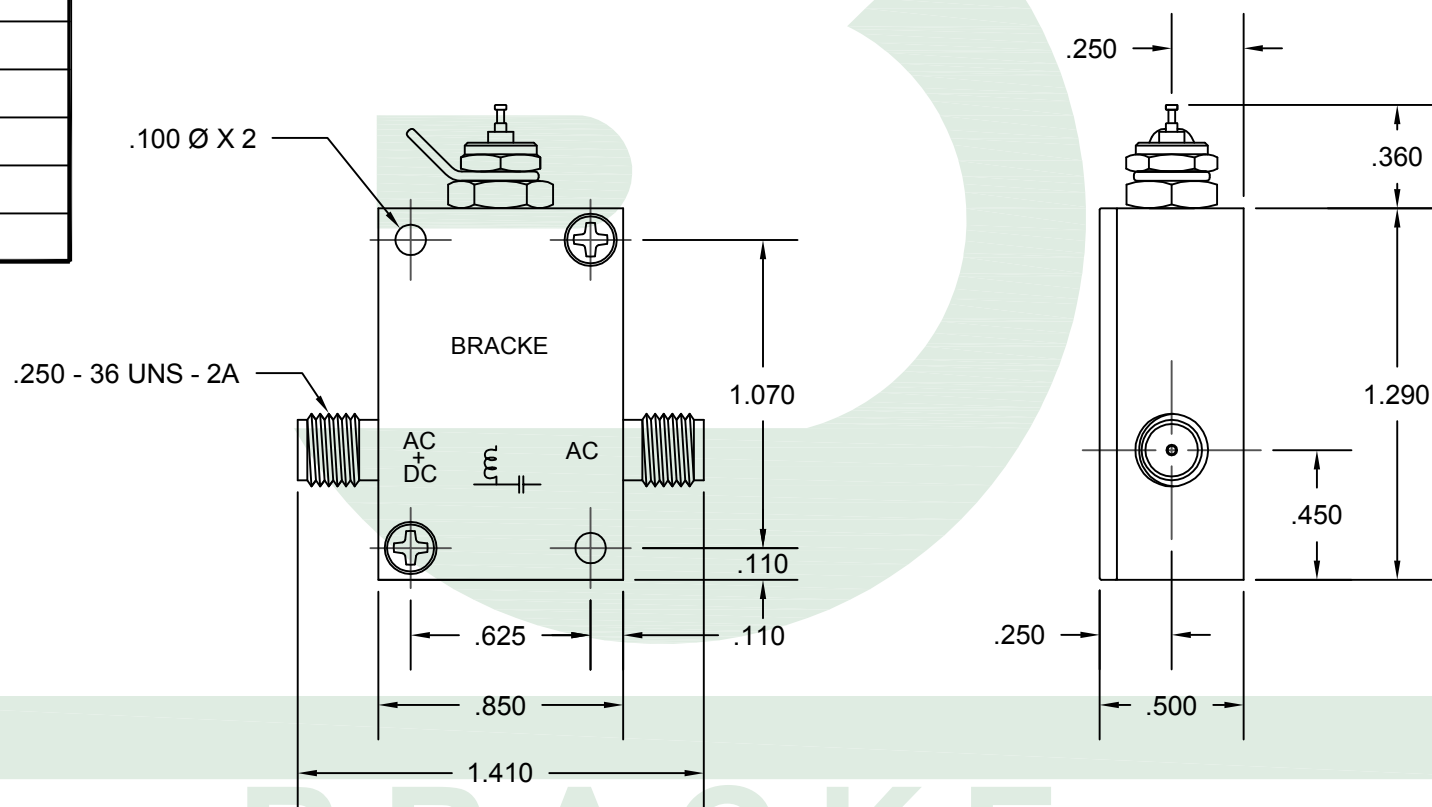

Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949)756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number	
BM13212	
Produced By	Checked By
002	013

Description
SMA Female Solder Lug & Pin Frequency Range .01-4 GHz [Bias Tee]
Notes
<ul style="list-style-type: none"> Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

CAGE / NAGE	
6LOW2	
Scale	Units
1.5:1	Inches
Date	Revision
10/22/2015	A-01

©2015 Bracke Manufacturing, LLC