


MATERIALS	
HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	1000 MΩ
OPERATING FREQUENCY	4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.30:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-40 to +105 C°
VOLTAGE RATING	335 VOLTS
INTERFACE	USCAR-18, DIN
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B



Scale 2:1

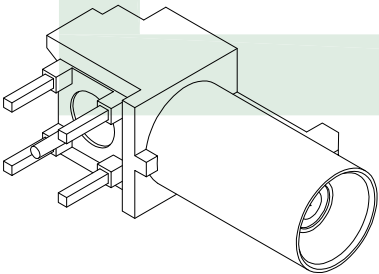

FAKRA CONNECTOR
CODE Z

BRACKE
Bracke Manufacturing, LLC

Part Number	
BM61733	
Produced By	Checked By
002	014

Description

Fakra Plug Right Angle P.C. Mount .036" Round Contact
Color Code Z Water Blue [Connector]

- Notes
- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
 - The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2024 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Unit
3:1	Inches
Date	Revision
8/05/2024	A-01

