
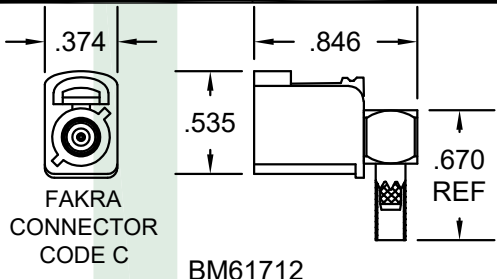
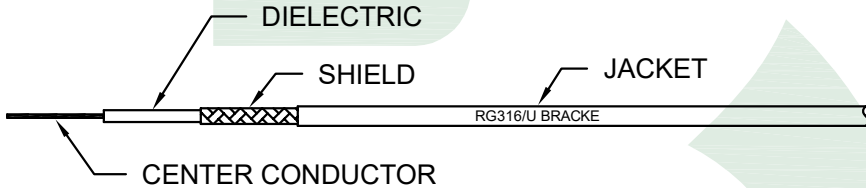
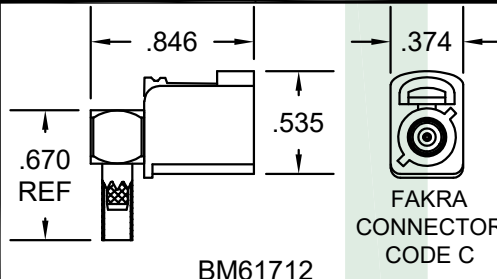



CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	1 SHIELD SILVER PLATED COPPER	IMPEDANCE	50 OHMS
HOUSING	PLASTIC	JACKET	.102" Ø FLUORINATED ETHYLENE PROPYLENE	NOMINAL CAPACITANCE	29.4 PF/FOOT	HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED	DIELECTRIC	.060" Ø PTFE	MAX OPERATING VOLTAGE	1,200 VOLTS RMS	INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	CENTER CONDUCTOR	.0201" Ø (7 STRANDS .0067" Ø) SILVER CLAD COVERED STEEL	OPERATING TEMPERATURE	-55°C TO +200°C	CONTACT	GOLD PLATED
INSULATOR	PTFE					INSULATOR	PTFE
							

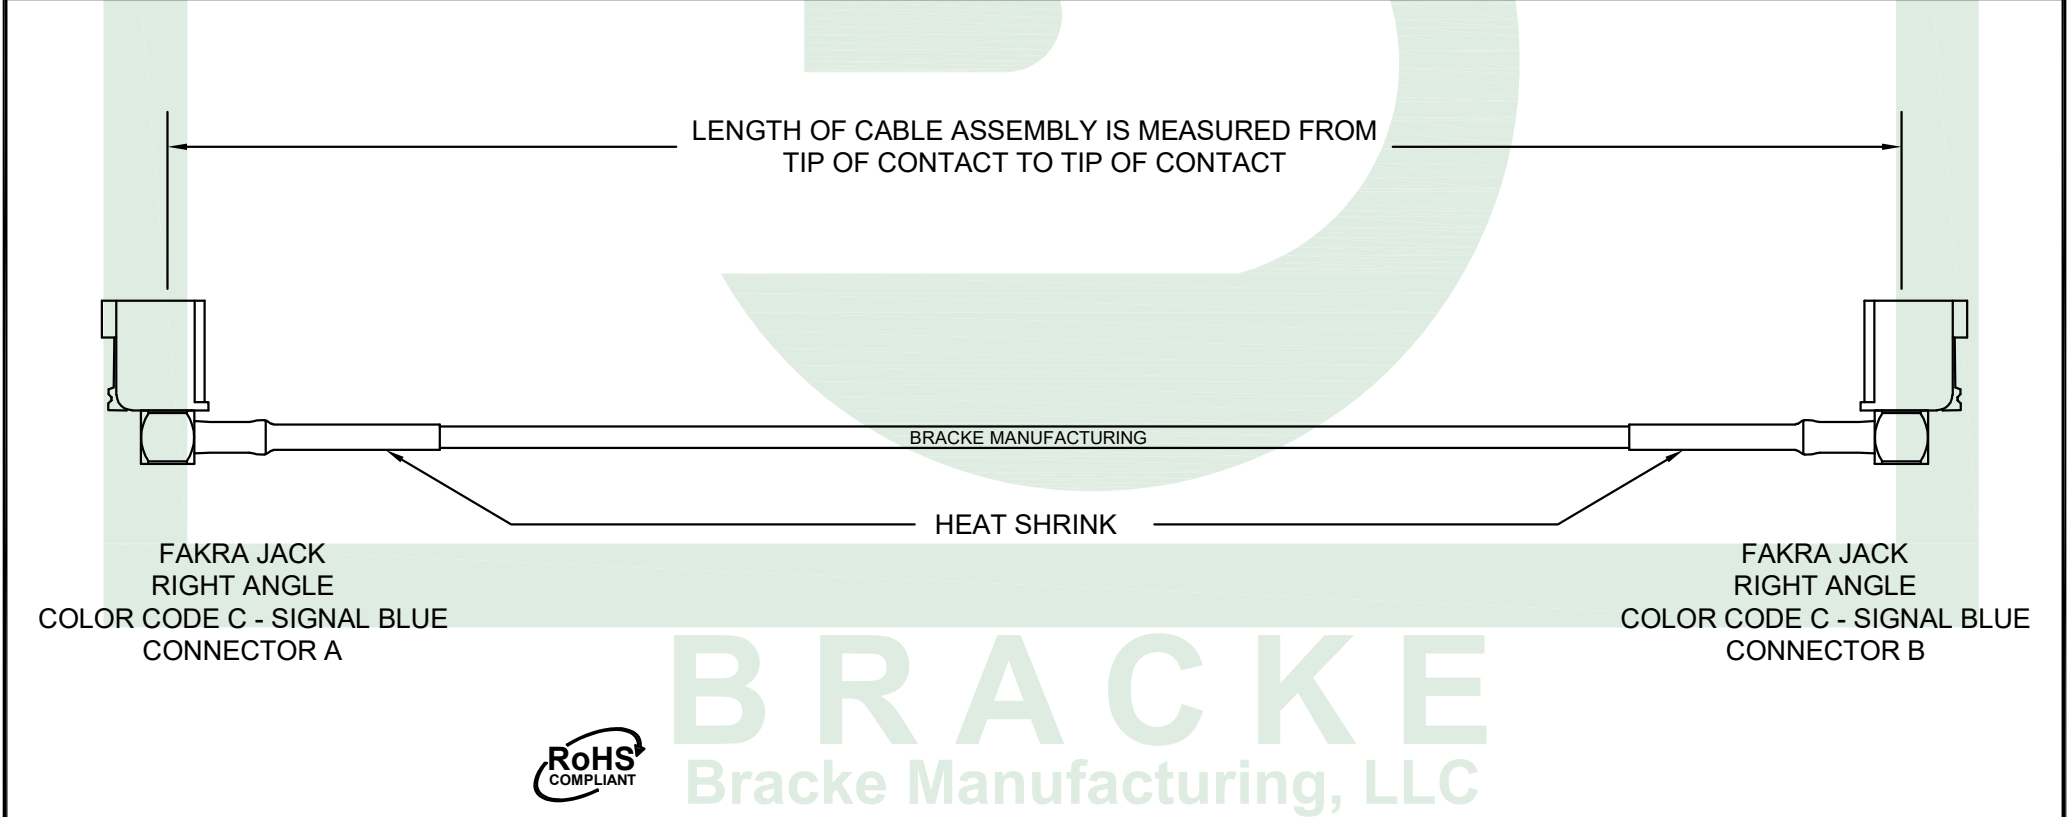

 <b>BRACKE</b>	<b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com		Part Number		Description		CAGE / NAGE	
			<b>BM92859.**</b>				6LOW2	
			Produced By	Checked By	<b>Notes</b> <ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li><li>• Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater</li><li>• Replace ** with ANY length in Inches</li></ul> <div>©2024 Bracke Manufacturing, LLC</div>		Scale	Unit
			002	013			1:1	Inches
							Date	Revision
				08/26/2024	A-01			